


G&P BACKSTAND IDLERS




**SPRING TENSIONED
and AIR TENSIONED**

models and specifications
shown on other side

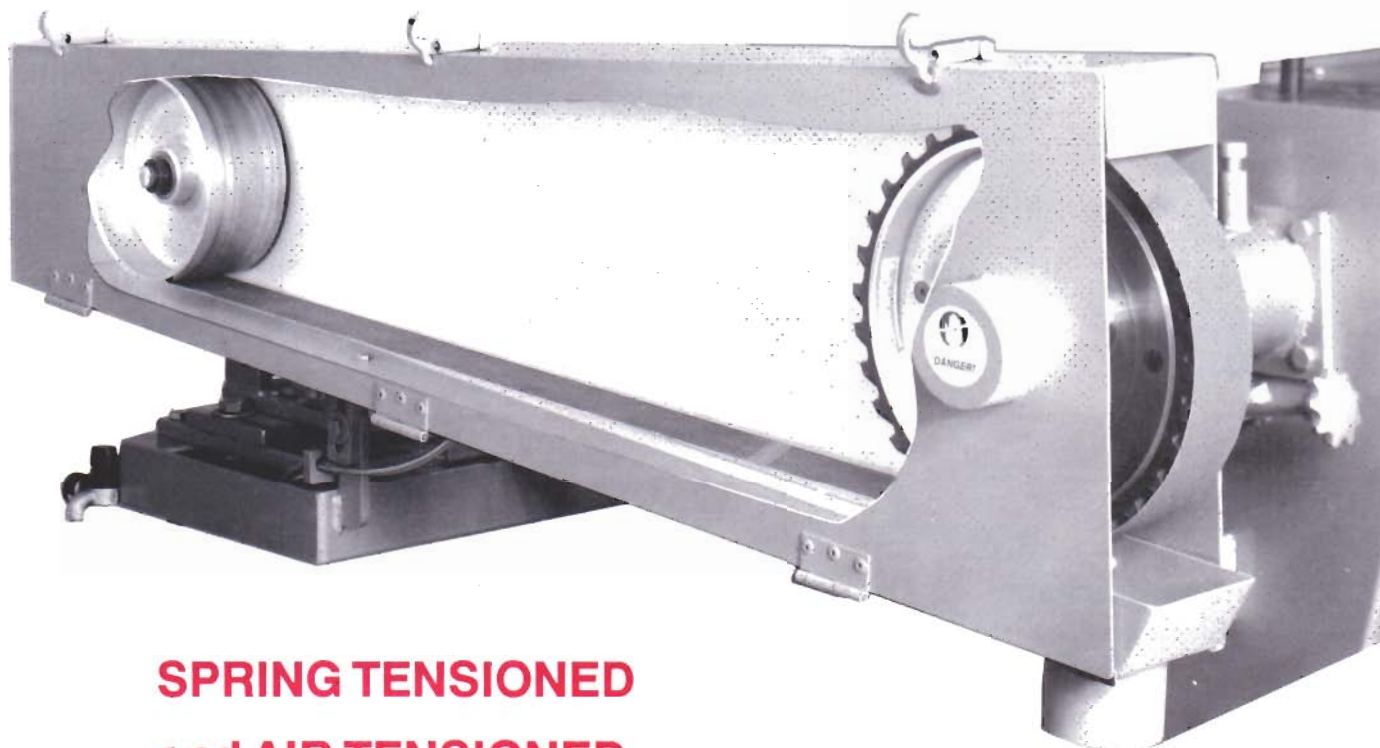

MODEL SBS-4
Left Hand
with optional angle
mounting brackets

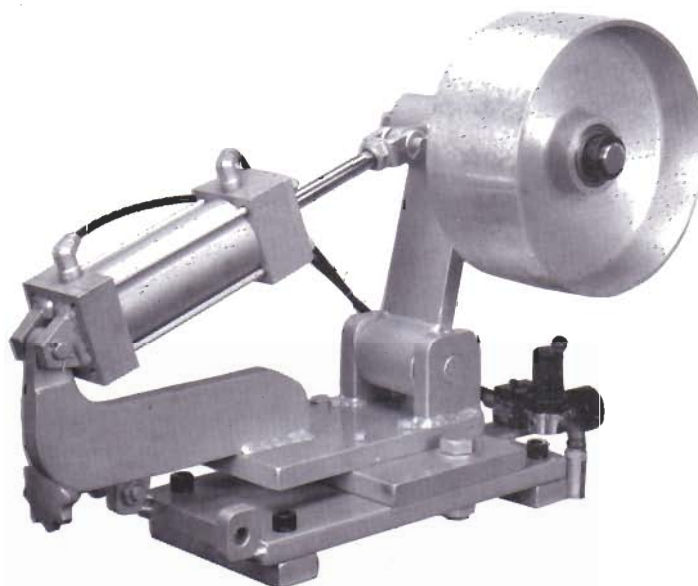

MODEL ABS-HD-4 - Right Hand

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

Always wear eye protection when grinding • Be sure all guards are in place.



G & P BACKSTAND IDLERS



SERIES SBS (Replaces RBS)

SPRING TENSIONED

The SBS series of backstand idlers offer an economical method of tensioning an abrasive belt for manual grinding applications. Tension is provided by a torsion spring. The 6" dia. pulley is machined from an aluminum casting, and rotates on sealed ball bearings. The arm and base of the backstand are made of cast iron.

Model SBS-4 for belts of 4" width or less
Model SBS-6 for belts of 6" width or less

ACCESSORIES:

Angle Mounting Brackets

Shown on the front of this bulletin. When the backstand idler is to be at the floor level, the angle mounting brackets position it at an angle that simplifies mounting a guard.

Pedestal

Provides a mounting for the backstand idler at approximately the same height as the contact wheel.

Universal Joint

Provides the advantage of removing the tracking knob from the base of the backstand and repositioning it at the front of the machine within easy reach of the operator.



SERIES ABS-HD

AIR TENSIONED

The ABS-HD series is adequate for grinding applications where pressure assist units are used to apply grinding pressure. Tension is provided by a heavy duty air cylinder. The 9" dia. pulley is machined from an aluminum casting, & rotates on sealed ball bearings. The base of the unit is a weldment.

Model ABS-HD-4 for belts of 4" width or less
Model ABS-HD-6 for belts of 6" width or less