


THROUGH FEED O.D. CYLINDRICAL FINISHERS

**Straight or Tapered parts of Metal,
Plastics, Wood, Glass, Fiberglass,
Molded Rubber, Fibre**


**Double Belt --- Single Belt
Rough and Finish in One Pass
On Double Belt Machine**

DISTRIBUTED
BY ...

(((G+P)))
MACHINERY

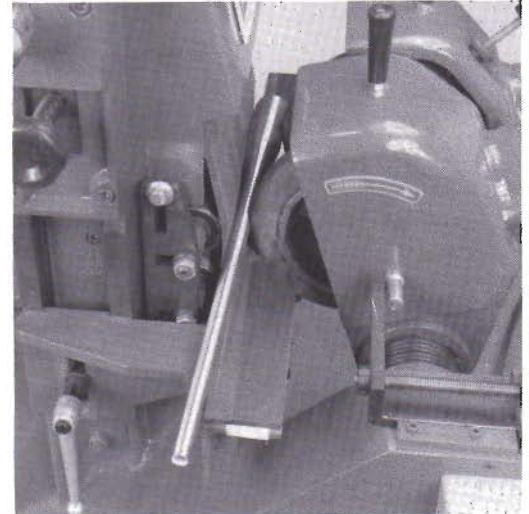

Because the part makes contact with the abrasive belt in an unsupported area, it is possible to polish tapered parts and straight parts.

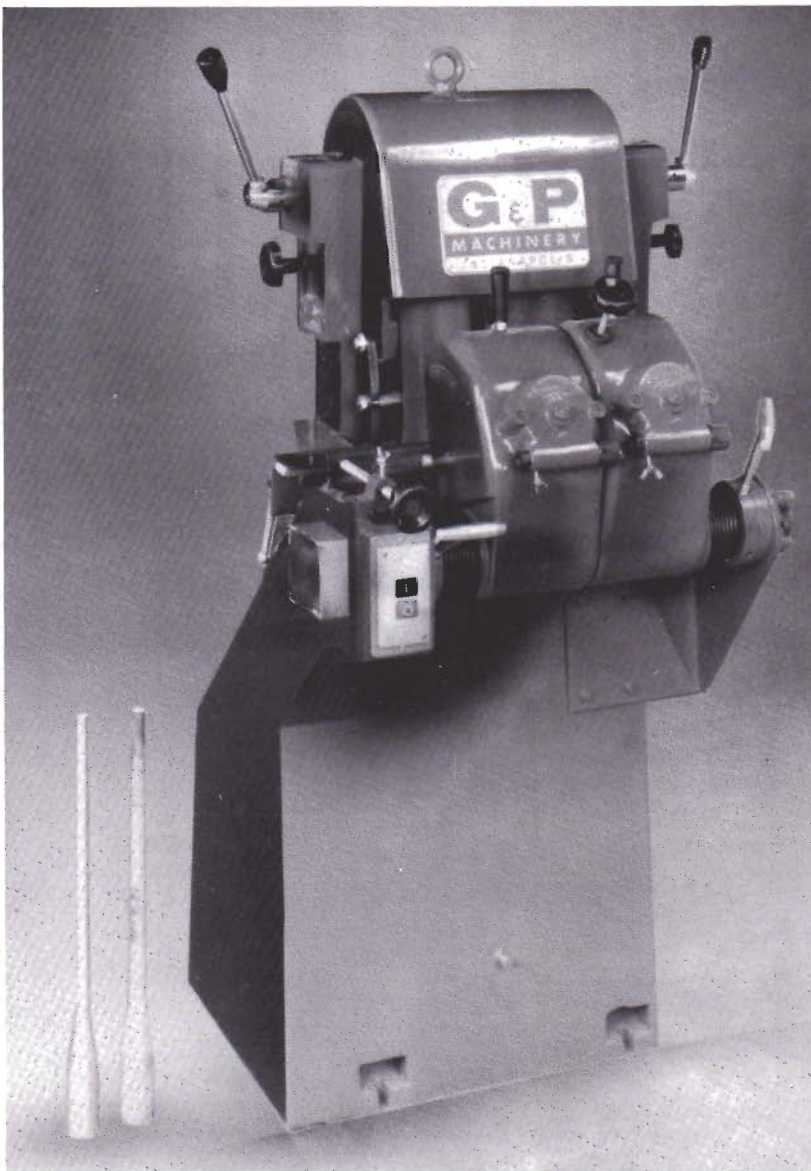

DOUBLE BELT MACHINE

TYPE CF-80B2

Range of work diameter.....	1/2"-3"
Head drive motor.....	5 H.P. - 3 Phase
Vacuum suction motor.....	1/2 H.P. - 3 Phase
Abrasive belt.....	(5"x73")
Belt speed.....	3500 SFPM
Feed speed.....	20-65 FPM
Machine size (LxWxH).....	28x28x53
Net weight.....	1080 lbs
Gross weight.....	1200 lbs

SINGLE BELT MACHINE

TYPE CF-80B

Range of work diameter.....	1/2"-3"
Head drive motor.....	3 H.P. - 3 Phase
Vacuum suction motor.....	1/2 H.P. - 3 Phase
Abrasive belt.....	(5"x73")
Belt speed.....	3500 SFPM
Feed speed.....	20-65 FPM
Machine size (LxWxH).....	30x20x51
Net weight.....	704 lbs
Gross weight.....	792 lbs

All specifications subject to change without notice.